



STELLAR


3N+72 Dual-Glass Module


655W-675W


Technical Features :

 Partial Shading Optimisation


 Better Temperature Coefficient


 High Temperature Restriction

 Micro-crack Resistance

 Higher Power

 Lower BOS

 More Aesthetic Values

 Infinite Technology



red dot winner 2023



Product Warranty





Performance Warranty




Warranty partner

Munich RE 

675W Output **25.0%** Efficiency **≤1%** First-year Degradation **≤0.35%** Annual Degradation from Year 2-30

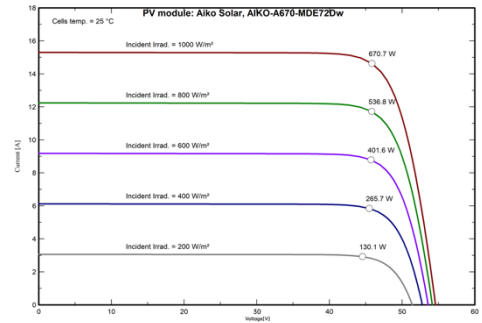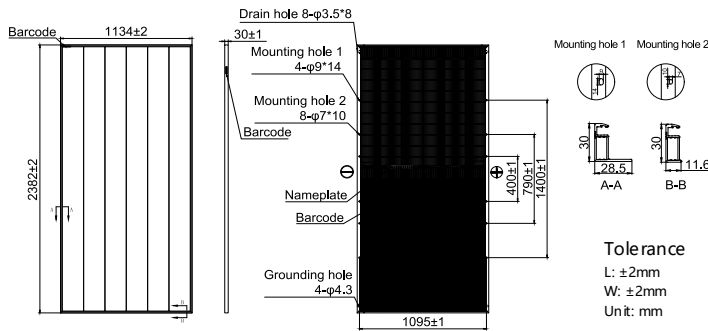

30-year Linear Performance Warranty

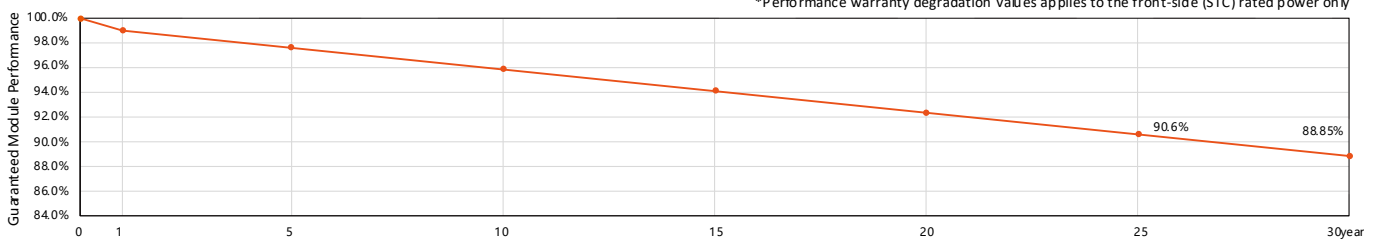

Module Type	AIKO-A655-MDE72Dw						AIKO-A660-MDE72Dw			AIKO-A665-MDE72Dw			AIKO-A670-MDE72Dw			AIKO-A675-MDE72Dw		
	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI	STC	NOCT	BNPI
Test Conditions	STC: AM1.5 1000W/m ² 25°C NOCT: AM1.5 800W/m ² 20°C 1m/s BNPI: front 1000W/m ² + rear 135W/m ²																	
P _{max} [W]	655	496	690	660	500	695	665	504	700	670	508	705	675	512	710			
V _{oc} [V]	54.10	51.33	54.10	54.20	51.42	54.20	54.40	51.61	54.40	54.60	51.80	54.60	54.80	51.99	54.80			
V _{mp} [V]	45.40	43.07	45.40	45.50	43.17	45.50	45.60	43.26	45.60	45.70	43.36	45.70	45.80	43.45	45.80			
I _{sc} [A]	15.12	12.22	15.94	15.18	12.27	16.00	15.24	12.31	16.06	15.30	12.36	16.12	15.36	12.41	16.18			
I _{mp} [A]	14.43	11.54	15.21	14.51	11.60	15.29	14.59	11.66	15.38	14.67	11.72	15.46	14.74	11.79	15.54			
Module Efficiency	24.2%			24.4%			24.6%			24.8%			25.0%					

Module Type	AIKO-A655-MDE72Dw		AIKO-A660-MDE72Dw		AIKO-A665-MDE72Dw		AIKO-A670-MDE72Dw		AIKO-A675-MDE72Dw	
	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Backside Power Gain	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
P _{max} [W]	688	721	693	726	698	732	704	737	709	743
V _{oc} [V]	54.10	54.10	54.20	54.20	54.40	54.40	54.60	54.60	54.80	54.80
V _{mp} [V]	45.40	45.40	45.50	45.50	45.60	45.60	45.70	45.70	45.80	45.80
I _{sc} [A]	15.88	16.63	15.94	16.70	16.00	16.76	16.07	16.83	16.13	16.90
I _{mp} [A]	15.15	15.87	15.24	15.96	15.32	16.05	15.40	16.137	15.48	16.21

Short Circuit Current @ BSI: 16.74±3% (BSI Test condition: front irradiance 1000 W/m², rear irradiance 300 W/m²)

Product Specification	
Cell Type	N-Type ABC
Glass	Dual glass, 2.0 + 2.0mm coated semi tempered glass
Frame	Anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) + 400mm, -200mm/±1400mm or Customized Length
No. of Cells	144(6*24)
Junction Box	IP68, 3 bypass diodes
Connector	Stäubli Electrical Connectors AG – MC4-EVO2 series PV-KST4-EVO2, PV-KBT4-EVO2 or AIKO-01C (Zhejiang Aiko Solar Technology Co., Ltd.). Refer to the module label for the full connector model designation.
Weight	32.2kg±3%
Dimension	2382*1134*30mm
Package Detail	36pcs per pallet / 144pcs per 20' GP / 720pcs per 40'HC

Temperature Ratings (STC)	
Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide	
T _{gb} max	70°C
Operation Temperature	-40°C to +70°C
Maximum Series Fuse Rating	30A
Protection Class	Class II
Maximum System Voltage	DC1500V
Maximum Static Loading	Front +5400Pa Back -2400Pa
Hail Test	35 mm diameter hail at 27.2 m/s
Fire Rating	IEC Class A



Zhejiang Aiko Solar Energy Technology Co., Ltd.
www.aikosolar.com
marketing@aikosolar.com
Made in China

*AIKO reserves right to update the specification without notice
*Optional Munich Re coverage is available upon request
202602_V4.1_EN