

DHN-66X16(BB)


525~540W

High Efficiency Single Glass PV Module


Comprehensive Products & System Certificates


IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001
2018/International standards for occupational health & safety
ISO 14001
2015/Standards for environmental management system
ISO 9001
2015/Quality management system


 Material & technology warranty


 Linear power output warranty


Higher power, longer service life, linear power warranty for 30 years


TOPCon cells have a lower decay rate,
≤ 1% in the first year and ≤ 0.4% in the second year

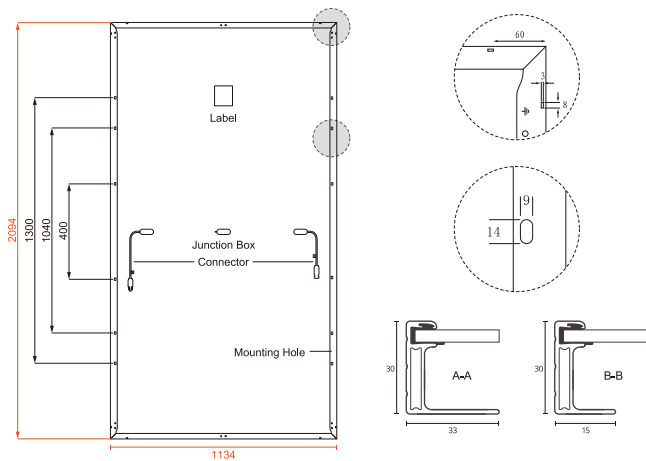

Lower temperature coefficient,
better high-temperature resistance, reduced power loss


Better weak light performance, higher power generation under
low light conditions, with 0.5% -1% more power generation


LECO laser assisted sintering technology,
reduces contact resistance and improves efficiency by 0.2% -0.5%

DHN-66X16(BB) 525~540W

Design



30-Year Linear Power Output Warranty



- DAH Solar linear power output guarantee
- Standard linear power output guarantee

Mechanical Specification

No. of Cells	132 (6×22)
Weight	24.9kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	2094×1134×30mm
Packing	36pcs/Pallet, 792pcs/40HQ

Cable(Including connector)	4.0mm ² , 300/200mm in length, length can be customized
Glass	3.2mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

STC-Electrical Characteristics

Module Type	DHN-66X16(BB)			
	525	530	535	540
Maximum Power (P _{max} /W)	525	530	535	540
Open-circuit Voltage (V _{oc} /V)	46.8	47.0	47.2	47.4
Maximum Power Voltage (V _{mp} /V)	39.7	39.9	40.1	40.3
Short-circuit Current (I _{sc} /A)	14.08	14.14	14.20	14.26
Maximum Power Current (I _{mp} /A)	13.22	13.28	13.34	13.40
Module Efficiency (%)	22.11	22.32	22.53	22.74

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Electrical Characteristics

Maximum Power (P _{max} /W)	395	399	402	406
Open-circuit Voltage (V _{oc} /V)	44.46	44.65	44.84	45.03
Maximum Power Voltage (V _{mp} /V)	37.72	37.91	38.10	38.29
Short-circuit Current (I _{sc} /A)	11.37	11.42	11.46	11.51
Maximum Power Current (I _{mp} /A)	10.47	10.51	10.56	10.61

NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	25A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (αI _{sc})	0.046%/°C
Temperature Coefficient of V _{oc} (βV _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (γP _{mp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa