


DHN-78X16/DG(BW) 620~640W

High Efficiency Double Glass PV Module

Comprehensive Products & System Certificates

IEC 61215 / IEC 61730 / CE / INMETRO
ISO 45001
2018/International standards for occupational health & safety
ISO 14001
2015/Standards for environmental management system
ISO 9001
2015/Quality management system

 15 Material & technology warranty

 30 Linear power output warranty



Bifacial Rate Up to 85% and More Back Power Generation by 5-25%



Double-glass Technology, higher encapsulation blocking and mechanical strength



Higher performance in anti hidden cracking, acid and alkali, salt spray, water vapor, UV, PID



TOPCon cells, lower attenuation, better temperature coefficient & dim light performance




LECO laser assisted sintering technology, reduces contact resistance and improves efficiency by 0.2% -0.5%




DHN-78X16/DG(BW) 620~640W

Design

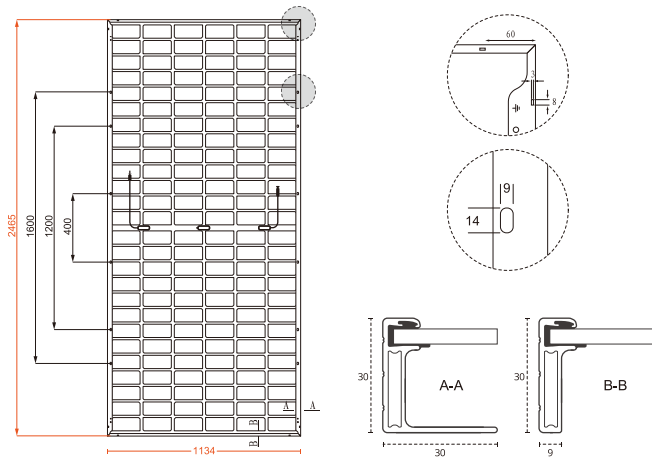

30-Year Linear Power Output Warranty

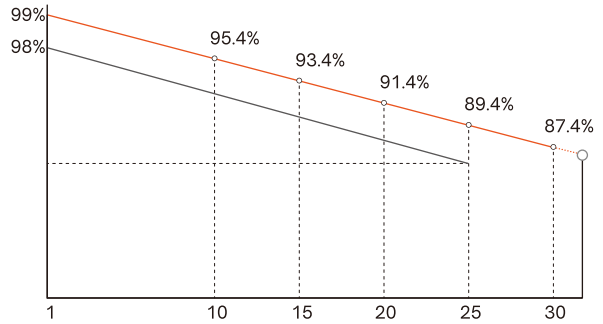

- DAH Solar linear power output guarantee
- Standard linear power output guarantee

Mechanical Specification

No. of Cells	156 (6×26)
Weight	34.2kg
Cells Type	N-type 182×91mm
Dimension (L×W×T)	2465×1134×30mm
Packing	36pcs/Pallet, 576pcs/40HQ

Cable(Including connector)	4.0mm ² , 300/200mm in length, length can be customized
Glass	2.0mm High Transmission, Antireflection Coating
Junction Box	IP68, 3 Bypass Diodes
Connector	MC4 Compatible

Electrical Characteristics

Module Type	DHN-78X16/DG(BW)											
	STC		NOCT		STC		NOCT		STC		NOCT	
Test conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (P _{max} /W)	620	466	625	470	630	474	635	478	640	481	640	481
Open-circuit Voltage (V _{oc} /V)	55.6	52.8	55.8	53.0	56.0	53.2	56.2	53.4	56.4	53.6	56.4	53.6
Maximum Power Voltage (V _{mp} /V)	46.8	44.5	47.0	44.7	47.2	44.8	47.4	45.0	47.6	45.2	47.6	45.2
Short-circuit Current (I _{sc} /A)	14.08	11.37	14.14	11.42	14.20	11.46	14.26	11.51	14.32	11.56	14.32	11.56
Maximum Power Current (I _{mp} /A)	13.25	10.49	13.30	10.53	13.35	10.57	13.40	10.60	13.45	10.64	13.45	10.64
Module Efficiency (STC)	22.18%		22.36%		22.54%		22.72%		22.90%		22.90%	
Refer Bifacial Factor	80±5%											

STC-Standard Test Environment: Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Standard Test Environment: Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

Double-Sided Power Generation Parameters (Rear gain)

5%	Maximum Power (P _{max})	651	656.25	661.5	666.75	672
	Module Efficiency (%)	23.29	23.48	23.66	23.85	24.04
15%	Maximum Power (P _{max})	713	719	725	730	736
	Module Efficiency (%)	25.51	25.71	25.92	26.12	26.33
25%	Maximum Power (P _{max})	775	781	788	794	800
	Module Efficiency (%)	27.73	27.95	28.17	28.40	28.62

Operating Parameters

Maximum System Voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum Series Fuse Rating	30A
Nominal Operating Cell Temperature	45°C±2°C
Application Level	Class A

Temperature Coefficient

Temperature Coefficient of I _{sc} (ΔI _{sc})	0.046%/°C
Temperature Coefficient of V _{oc} (ΔV _{oc})	-0.25%/°C
Temperature Coefficient of P _{max} (ΔP _{mp})	-0.29%/°C
Snow load, frontside / Wind load, backside	5400Pa/2400Pa