

400 / 405 / 410 / 415

GHxxxM10RT-B48HSW-C GHxxxM10RT-B48HST-C



15 Years Product Warranty

30 Years Peak Power Warranty



Birth for greenhouse & Carport

Fit for carport, existing and new build greenhouse.





Double use of land

Beside create shelter space under the panel it also harvests energy.



Much less A/C cost

Sandwich structure, big part of heat turns to electricity.

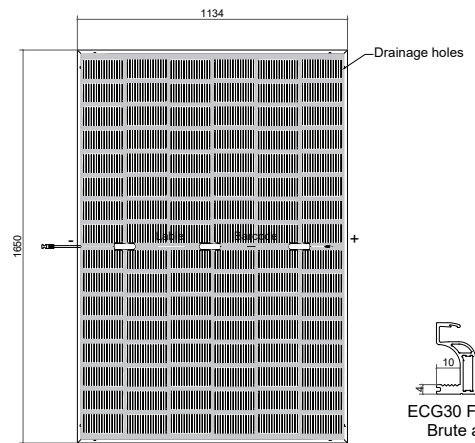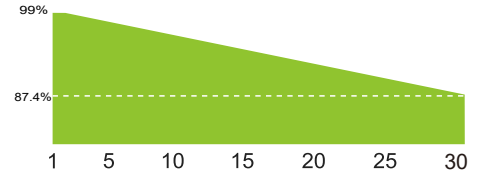

Electrical Specifications at STC

	400	405	410	415
Maximum Power (Pmax/W)	400	405	410	415
Maximum Power Current (Imp/A)	13.53	13.60	13.67	13.74
Maximum Power Voltage (Vmp/V)	29.60	29.80	30.00	30.20
Short-circuit Current (Isc/A)	14.04	14.11	14.18	14.25
Open-circuit Voltage (Voc/V)	35.44	35.64	35.84	36.04
Module Efficiency (%)	21.38%	21.65%	21.91%	22.18%
Bifaciality: 80%±5% STC: AM1.5 1000W/m ² 25°C Measurement uncertainty: ±3%				

Mechanical Data

Cell Type	N type Mono-crystalline
Cell Arrangement	96(6x16)
Module Dimensions	1650x1134x30mm
Weight	23.4kg
Module Structure	Glass/Encapsulant/Glass
Glass Thickness	2.0mm+2.0mm
Safety Class	Class II
Junction Box Rating	IP68
Cables+connector	4mm ² /(+)110mm;(-)350mm or Customized
Connector Type	PV-ZH202B or MC4-EVO 2A (1500V)

Packaging

Pallet Dimensions	1690*1140*1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	1008

Temperature Characteristics

Nominal Module Operating Temperature	42±2°C
Temperature Coefficient of Isc	+0.048%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.29%/°C

Maximum Ratings

Operating Temperature	-40°C to +85°C	Maximum Series Fuse Rating	30A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	3
Maximum System Voltage	1500V DC (IEC)		

Statement: DMEGC reserve the right optimize the above data from time to time.

Ver: 20250717