


BIFACIAL MODULE WITH DUAL GLASS

RS5J-635~655NBG-E1


N-Type /Positive power tolerance of 0~+3%/Max module efficiency 24.25%

- Suitable for Ground Power Plants and Distributed Projects
- Advanced Module Technology Delivers Superior Module Efficiency
 - Non destructive cutting · MBB half-cut
- Excellent Power Generation Performance
 - Excellent IAM and low irradiation performance · Lower temperature coefficient
 - 0.40% linear Power decline
- High module Quality Ensures Long-term Reliability
 - Strict selected material · Advanced technology · Leading standard
- Enhanced Mechanical Load
 - Mechanical performance up to 5400pa positive load and 2400pa negative load

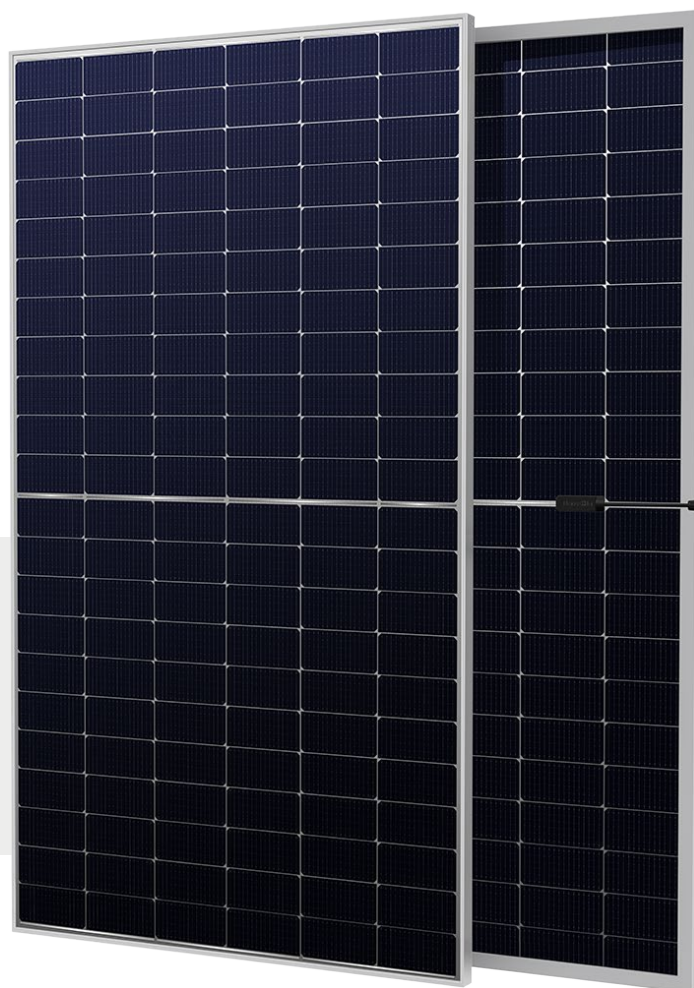

Complete System and IEC Product Certification

IEC 61215 , IEC 61730 ISO9001:
 2015: Quality Management System ISO14001:
 2015: Environment Management System
 ISO45001: 2018: Occupational Health and Safety Management System

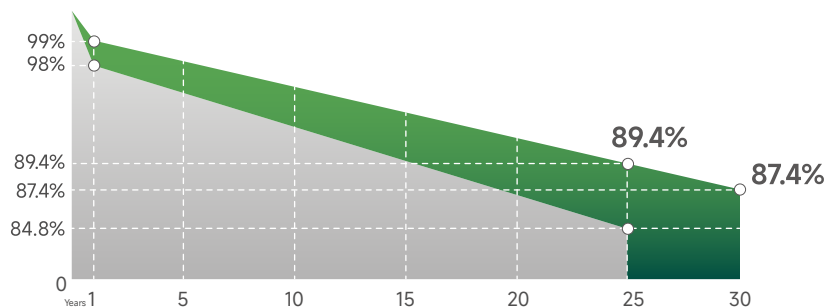


30-Year Excess Linear Power Output Warranty

BLOOMBERG
TIER 1
 Global
 Leading Brand




RS5J-635~655NBG-E1

BIFACIAL MODULE WITH DUAL GLASS

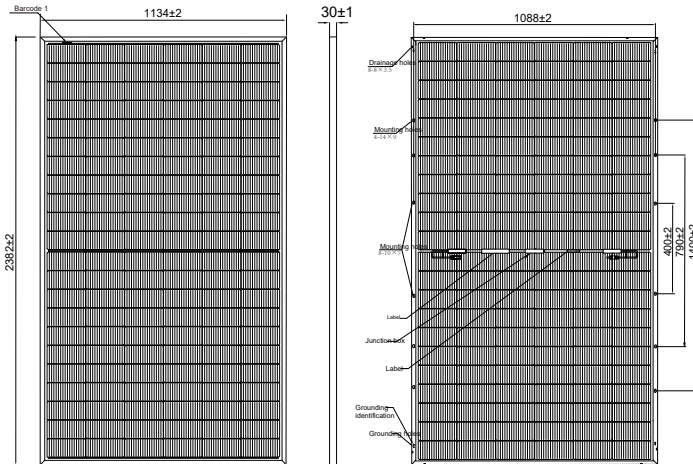

Drawing Only for Reference

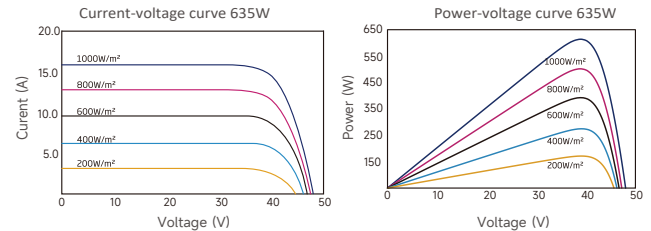

Electrical Characteristics STC	RS5J-635NBG-E1	RS5J-640NBG-E1	RS5J-645NBG-E1	RS5J-650NBG-E1	RS5J-655NBG-E1
Maximum Power (Pmax)	635W	640W	645W	650W	655W
Power Tolerance	0~+5W	0~+5W	0~+5W	0~+5W	0~+5W
Module Efficiency	23.51%	23.69%	23.88%	24.06%	24.25%
Maximum Power Current (Imp)	15.41A	15.46A	15.51A	15.56A	15.61A
Maximum Power Voltage (Vmp)	41.21V	41.40V	41.59V	41.77V	41.96V
Short Circuit Current (Isc)	16.26A	16.32A	16.38A	16.44A	16.50A
Open Circuit Voltage (Voc)	49.68V	49.88V	50.08V	50.28V	50.48V

Values at Standard Test Conditions STC (AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

Electrical Characteristics BNPI	RS5J-635NBG-E1	RS5J-640NBG-E1	RS5J-645NBG-E1	RS5J-650NBG-E1	RS5J-655NBG-E1
Maximum Power (Pmax)	704W	709W	715W	720W	726W
Maximum Power Current (Imp)	17.07A	17.13A	17.19A	17.24A	17.30A
Maximum Power Voltage (Vmp)	41.21V	41.40V	41.59V	41.77V	41.96V
Short Circuit Current (Isc)	18.02A	18.08A	18.15A	18.22A	18.28A
Open Circuit Voltage (Voc)	49.68V	49.88V	50.08V	50.28V	50.48V

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Ambient Temperature 25°C, AM=1.5, Power Bifaciality:80±5%.

Electrical Characteristics Rear Side Power Gain	RS5J-635NBG-E1		RS5J-640NBG-E1		RS5J-645NBG-E1		RS5J-650NBG-E1		RS5J-655NBG-E1	
Backside Power Gain	5%	10%	5%	10%	5%	10%	5%	10%	5%	10%
Maximum Power (Pmax)	667W	699W	672W	704W	677W	710W	683W	715W	688W	721W
Maximum Power Current (Imp)	16.18A	16.95A	16.23A	17.01A	16.29A	17.06A	16.34A	17.12A	16.39A	17.17A
Maximum Power Voltage (Vmp)	41.21V	41.21V	41.40V	41.40V	41.59V	41.59V	41.77V	41.77V	41.96V	41.96V
Short Circuit Current (Isc)	17.07A	17.89A	17.14A	17.95A	17.20A	18.02A	17.26A	18.08A	17.33A	18.15A
Open Circuit Voltage (Voc)	49.68V	49.68V	49.88V	49.88V	50.08V	50.08V	50.28V	50.28V	50.48V	50.48V

Mechanical Characteristics

Cell Type	Mono N-Type,132(6×22) Half-Cut cells
Glass	2mm+2mm,High Transmission,Low Iron,Semi-Tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68 Rated
Dimension	2382x1134x30mm
Output Cable	4mm2(EU),+200mm,-300mm or Customized
Weight	32.4kg
Connector	MC4 Compatible

Packing Information

Container	40' HQ
Pallets per Container	20
Pieces per Container	740

Characteristics

Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Pmax	-0.29%/°C
Nominal Operating Cell Temperature(NOCT)	43±2°C
Fire Performance	IEC Class C

Remark:Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

Maximum Ratings

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Maximum Series Fuse Rating	30A

