

Lumina II



Super Power Output

SolarSpace advanced N-Type cells combined with MBB and high-density encapsulation provides ultra-high power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



Extra Power Generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1st year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



Aesthetic Design

All black design brings highly consistent appearance for rooftops

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 55GW+ capacity of solar cell and ~8GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SS8-54HDB 420-440N


All Black Module

440W

Maximum
Power Output

22.53%

Maximum
Module Efficiency

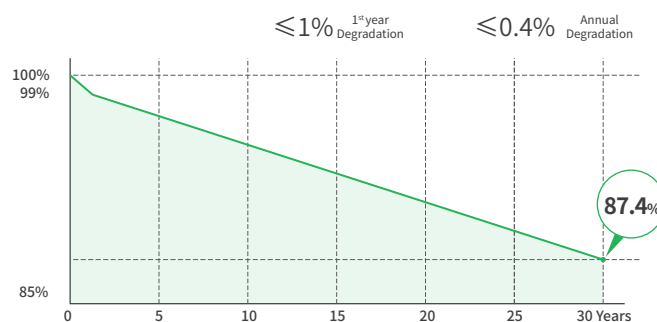

25Years Product Warranty **30**Years Linear Power Warranty

Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt Mist Corrosion Test • IEC62716: Ammonia Corrosion Test
- IEC60068: Dust and Sand Test
- ISO9001: 2015: Quality Management System
- ISO14001: 2015: Environment Management System
- ISO45001: 2018: Occupational Health and Safety Management Systems



Electric Characteristics (STC)

Module Type	SS8-54HDB -420N	SS8-54HDB -425N	SS8-54HDB -430N	SS8-54HDB -435N	SS8-54HDB -440N
Maximum Power (Pmax) [W]	420	425	430	435	440
Open-Circuit Voltage (Voc) [V]	37.89	38.08	38.27	38.46	38.65
Maximum Power Voltage (Vmp) [V]	31.85	32.03	32.21	32.37	32.55
Short-Circuit Current (Isc) [A]	13.99	14.07	14.13	14.21	14.29
Maximum Power Current (Imp) [A]	13.19	13.28	13.36	13.44	13.52
Module Efficiency	21.51%	21.76%	22.02%	22.28%	22.53%

Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Electric Characteristics (BNPI)

Module Type	SS8-54HDB -420N	SS8-54HDB -425N	SS8-54HDB -430N	SS8-54HDB -435N	SS8-54HDB -440N
Maximum Power (Pmax) [W]	465	470	475	480	485
Open-Circuit Voltage (Voc) [V]	37.89	38.08	38.27	38.46	38.65
Maximum Power Voltage (Vmp) [V]	31.85	32.03	32.21	32.37	32.55
Short-Circuit Current (Isc) [A]	15.59	15.66	15.73	15.80	15.87
Maximum Power Current (Imp) [A]	14.72	14.79	14.86	14.93	15.00

Irradiance Front: 1000 W/m² Rear:135 W/m², Cell Temperature 25 °C, AM=1.5


Bifacial Output-Rearside Power Gain (420W)

Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	441	462	483	504	525
Open-Circuit Voltage (Voc) [V]	38.10	38.10	38.10	38.20	38.20
Maximum Power Voltage (Vmp) [V]	31.94	31.94	31.94	31.95	31.95
Short-Circuit Current (Isc) [A]	14.51	15.06	15.60	16.16	16.71
Maximum Power Current (Imp) [A]	13.81	14.47	15.13	15.78	16.44

Temperature Coefficients

Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Pmax	-0.290%/°C
NMOT	45±2°C

Engineering Design

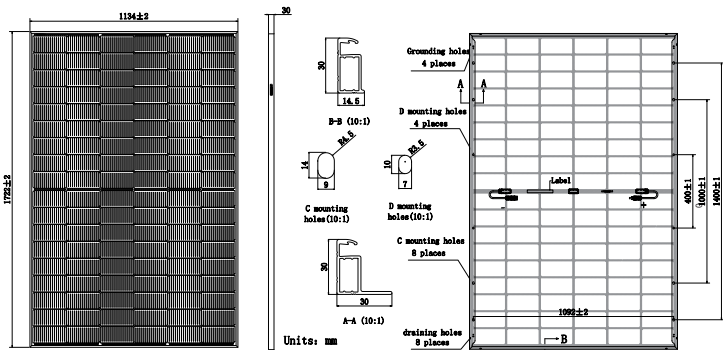


Mechanical Characteristics

Cell Type	N-Type
Number of Cells	108 (6x18)
Dimensions	1722X1134X30mm
Weight	24.0kg
Glass	Front glass, 2.0mm coated semi-tempered glass Back Glass, 2.0mm glazed semi-tempered glass
Frame	Black, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC), 300mm (including connector)
Junction Box	IP68 Rated, 3 diodes
Connector	PC-SS01 / PC-SS02 / MC4-EVO2 / MC4-EVO2A
Packaging	36 Pieces / Pallet, 936 Pieces / 40' HQ Container

Frame color and cable length are subject to the actual order

Characteristics

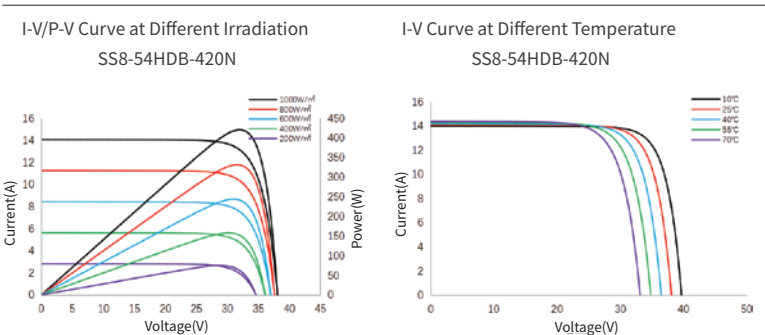

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	30A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80±10%



SolarSpace Technology Co., Ltd.

Specifications included in this datasheet are subject to change without notice. SolarSpace reserves the right of final interpretation.

www.solarspace.com contact@solarspace.com

Version No: EU 202608