

Lumina II



Super Power Output

SolarSpace advanced N-Type cells combined with MBB and high-density encapsulation provides ultra-high power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



Extra Power Generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1st year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 55GW+ capacity of solar cell and ~8GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SSA-48HDB 430-450N


All Black Module

450W

Maximum
Power Output

22.52%

Maximum
Module Efficiency

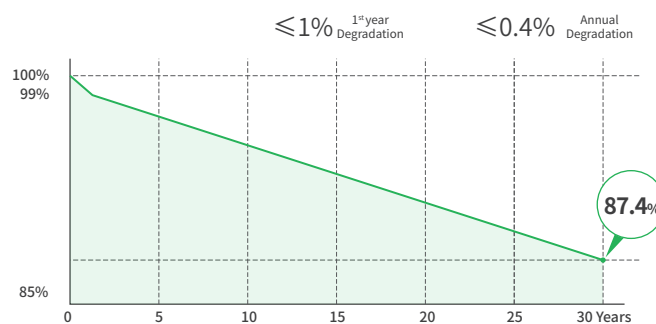

25Years Product Warranty **30**Years Linear Power Warranty

Comprehensive Certificates

- IEC61215 • IEC61730
- IEC61701: Salt Mist Corrosion Test • IEC62716: Ammonia Corrosion Test
- IEC60068: Dust and Sand Test
- ISO9001: 2015: Quality Management System
- ISO14001: 2015: Environment Management System
- ISO45001: 2018: Occupational Health and Safety Management Systems



Electric Characteristics (STC)

Module Type	SSA-48HDB -430N	SSA-48HDB -435N	SSA-48HDB -440N	SSA-48HDB -445N	SSA-48HDB -450N
Maximum Power (Pmax) [W]	430	435	440	445	450
Open-Circuit Voltage (Voc) [V]	34.48	34.66	34.84	35.02	35.20
Maximum Power Voltage (Vmp) [V]	29.37	29.55	29.73	29.91	30.09
Short-Circuit Current (Isc) [A]	15.84	15.89	15.94	15.99	16.04
Maximum Power Current (Imp) [A]	14.65	14.73	14.81	14.89	14.97
Module Efficiency	21.52%	21.77%	22.02%	22.27%	22.52%


Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Electric Characteristics (BNPI)

Module Type	SSA-48HDB -430N	SSA-48HDB -435N	SSA-48HDB -440N	SSA-48HDB -445N	SSA-48HDB -450N
Maximum Power (Pmax) [W]	480	485	490	495	500
Open-Circuit Voltage (Voc) [V]	34.48	34.66	34.84	35.02	35.20
Maximum Power Voltage (Vmp) [V]	29.37	29.55	29.73	29.91	30.09
Short-Circuit Current (Isc) [A]	17.74	17.78	17.82	17.86	17.90
Maximum Power Current (Imp) [A]	16.47	16.54	16.61	16.68	16.75

Irradiance Front: 1000 W/m² Rear:135 W/m² , Cell Temperature 25 °C, AM=1.5

Engineering Design

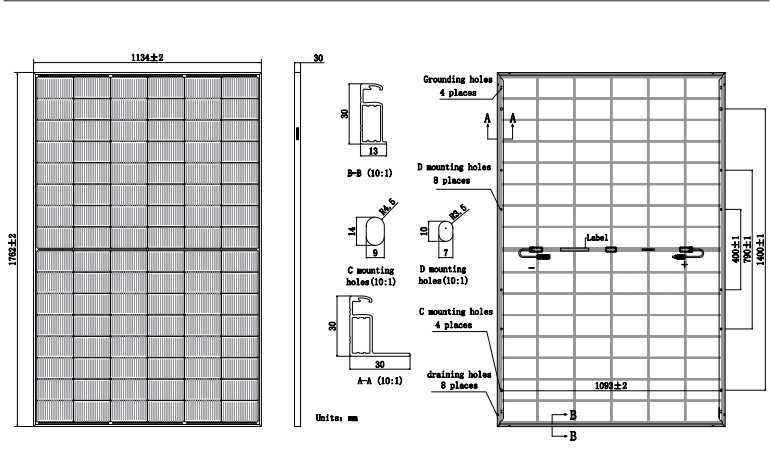

Bifacial Output-Rearside Power Gain (445W)

Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	467	490	512	534	556
Open-Circuit Voltage (Voc) [V]	35.02	35.02	35.02	35.12	35.12
Maximum Power Voltage (Vmp) [V]	29.91	29.91	29.91	30.01	30.01
Short-Circuit Current (Isc) [A]	16.79	17.59	18.39	19.19	19.99
Maximum Power Current (Imp) [A]	15.62	16.37	17.11	17.79	18.54


Temperature Coefficients

Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Pmax	-0.290%/°C
NMOT	45±2°C

Mechanical Characteristics

Cell Type	N-Type
Number of Cells	96 (6x16)
Dimensions	1762X1134X30mm
Weight	24.5kg
Glass	Front glass, 2.0mm coated semi-tempered glass Back Glass, 2.0mm glazed semi-tempered glass
Frame	Black, Anodized Aluminum Alloy
Output Cables	4mm ² (IEC), 300mm (including connector)
Junction Box	IP68 Rated, 3 diodes
Connector	PC-SS01 / PC-SS02 / MC4-EVO2 / MC4-EVO2A
Packaging	36 Pieces / Pallet, 936 Pieces / 40' HQ Container

Characteristics

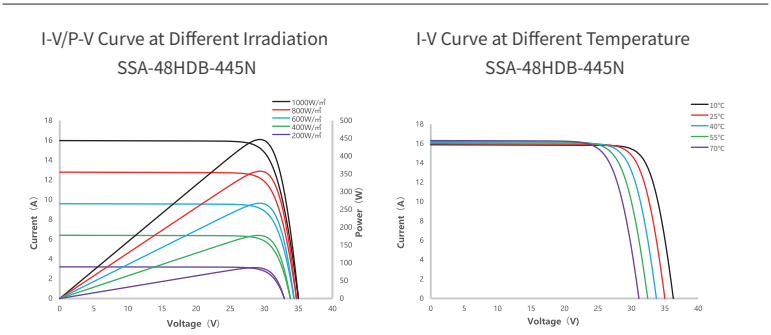

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	35A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80±10%