

Lumina II



Super Power Output

SolarSpace advanced N-Type cells combined with MBB and high-density encapsulation provides ultra-high power output



High Reliability

Excellent harsh tests results and advanced half-cell tech improve product reliability for long-term life cycle



Extra Power Generation

N-type wafers and cells bring ultralow LID&LeTID degradation, less than 1% 1st year degradation guaranteed, in addition lower temperature coefficient and better weak-light response provide extra power generation



High ROI

Bifacial power generation reduces BOS and system LCOE dramatically, promoting the project ROI

SolarSpace Technology Co., Ltd. was established in 2011, as a world leading solar cell and module manufacturer, concentrating on high efficient solar-technology production with 55GW+ capacity of solar cell and ~8GW capacity of solar module in China and overseas.

*Please refer to SolarSpace for details

SSA-66HD

595-625N


N-Type Bifacial Dual Glass Module

625W

Maximum
Power Output

23.14%

Maximum
Module Efficiency

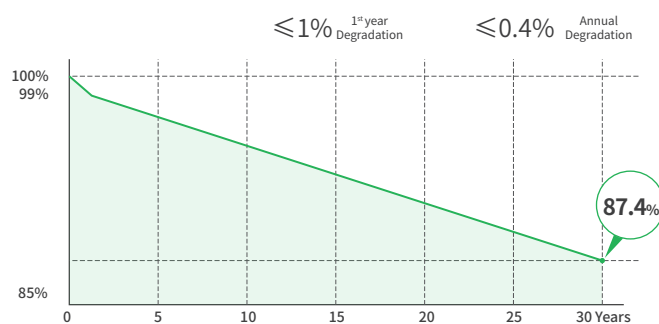

15Years Product Warranty **30**Years Linear Power Warranty

Comprehensive Certificates

- IEC61215 •IEC61730
- IEC61701: Salt Mist Corrosion Test •IEC62716: Ammonia Corrosion Test
- IEC60068: Dust and Sand Test
- ISO9001: 2015: Quality Management System
- ISO14001: 2015: Environment Management System
- ISO45001: 2018: Occupational Health and Safety Management Systems



Electric Characteristics (STC)

Module Type	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD
	-595N	-600N	-605N	-610N	-615N	-620N	-625N
Maximum Power (Pmax) [W]	595	600	605	610	615	620	625
Open-Circuit Voltage (Voc) [V]	48.38	48.58	48.78	48.98	49.18	49.38	49.58
Maximum Power Voltage (Vmp) [V]	40.33	40.47	40.61	40.75	40.89	41.03	41.17
Short-Circuit Current (Isc) [A]	15.68	15.74	15.80	15.86	15.92	15.98	16.04
Maximum Power Current (Imp) [A]	14.77	14.84	14.91	14.98	15.05	15.12	15.19
Module Efficiency	22.03%	22.21%	22.40	22.58%	22.77%	22.95%	23.14%

Irradiation 1000W/m², Cell Temperature 25°C, AM=1.5

Electric Characteristics (BNPI)

Module Type	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD	SSA-66HD
	-595N	-600N	-605N	-610N	-615N	-620N	-625N
Maximum Power (Pmax) [W]	660	665	670	675	680	685	690
Open-Circuit Voltage (Voc) [V]	48.38	48.58	48.78	48.98	49.18	49.38	49.58
Maximum Power Voltage (Vmp) [V]	40.33	40.47	40.61	40.75	40.89	41.03	41.17
Short-Circuit Current (Isc) [A]	17.47	17.53	17.59	17.65	17.71	17.77	17.83
Maximum Power Current (Imp) [A]	16.46	16.53	16.60	16.67	16.74	16.81	16.88

Irradiance Front: 1000 W/m² Rear: 135 W/m², Cell Temperature 25 °C, AM=1.5


Bifacial Output-Rearside Power Gain (610W)

Power Gain	5%	10%	15%	20%	25%
Maximum Power (Pmax) [W]	641	671	702	732	763
Open-Circuit Voltage (Voc) [V]	48.98	48.98	48.98	49.00	49.00
Maximum Power Voltage (Vmp) [V]	40.75	40.75	40.75	40.77	40.77
Short-Circuit Current (Isc) [A]	16.64	17.46	18.28	19.11	19.93
Maximum Power Current (Imp) [A]	15.74	16.47	17.23	17.96	18.72

Temperature Coefficients

Temperature Coefficient of Isc	+0.045%/°C
Temperature Coefficient of Voc	-0.260%/°C
Temperature Coefficient of Pmax	-0.290%/°C
NMOT	45±2°C


Engineering Design

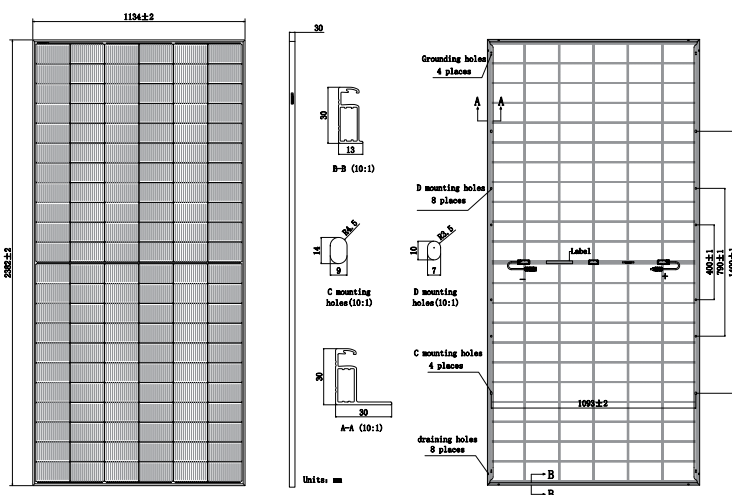

Mechanical Characteristics

Cell Type	Mono N-Type
Number of Cells	132 (6×22)
Dimensions	2382×1134×30mm
Weight	32.5kg
Glass	Front, 2.0mm AR coated semi-tempered glass Back, 2.0mm glazed semi-tempered glass
Frame	Anodized Aluminum Profile
Output Cables	4mm ² (IEC), 300mm (including connector)
Junction Box	IP68 Rated, 3 diodes
Connector	PC-SS01 / PC-SS02 / MC4-EVO2 / MC4-EVO2A
Packaging	36 Pieces / Pallet, 720 Pieces / 40' HQ Container Frame color and cable length are subject to the actual order

Characteristics

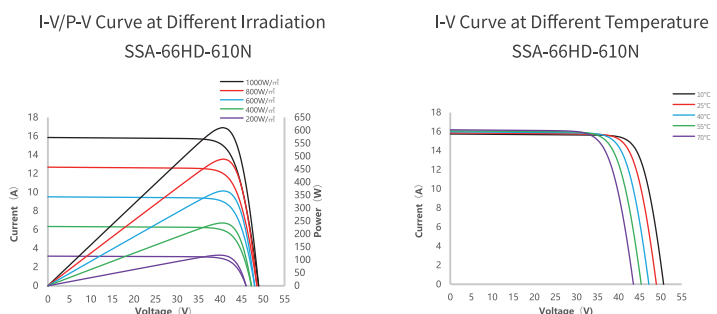

Operating Conditions

Maximum System Voltage	1500V DC (IEC)
Power Tolerance	0~+3%
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	35A
Mechanical Load Front Rear	5400Pa
Mechanical Load Back Rear	2400Pa
Bifaciality	80±10%

