


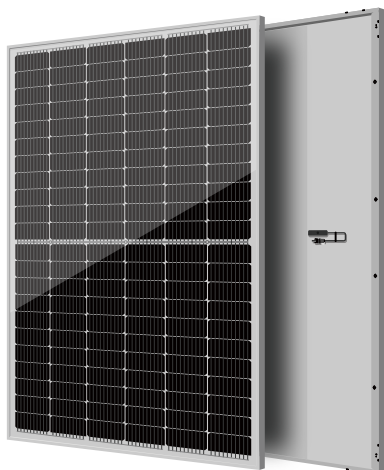

ZXM7-SHLD132 Series

10BB HALF-CELL Double Glass Monocrystalline
PERC PV Module

500-525W

POWER RANGE

22.11%

MAXIMUM EFFICIENCY

0.45%

YEARLY DEGRADATION



12 YEARS PRODUCT WARRANTY



30 YEARS OUTPUT GUARANTEE

12 years product warranty for general application
15 years product warranty for Rooftop PV system
30 years output warranty / 0.45% Annual Degradation over 30 years




IEC 61215/IEC 61730

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets, please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

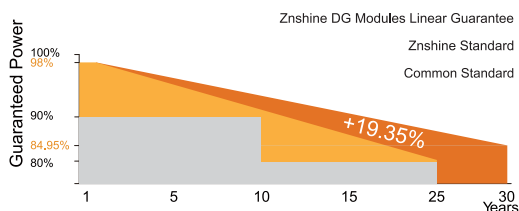

*Please check the valid version of Limited Product Warranty which is officially released by ZNSHINE PV-TECH Co.,Ltd.

KEY FEATURES



Excellent Cells Efficiency

MBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



TIER 1


Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.




Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.


DIMENSIONS OF PV MODULE(mm)

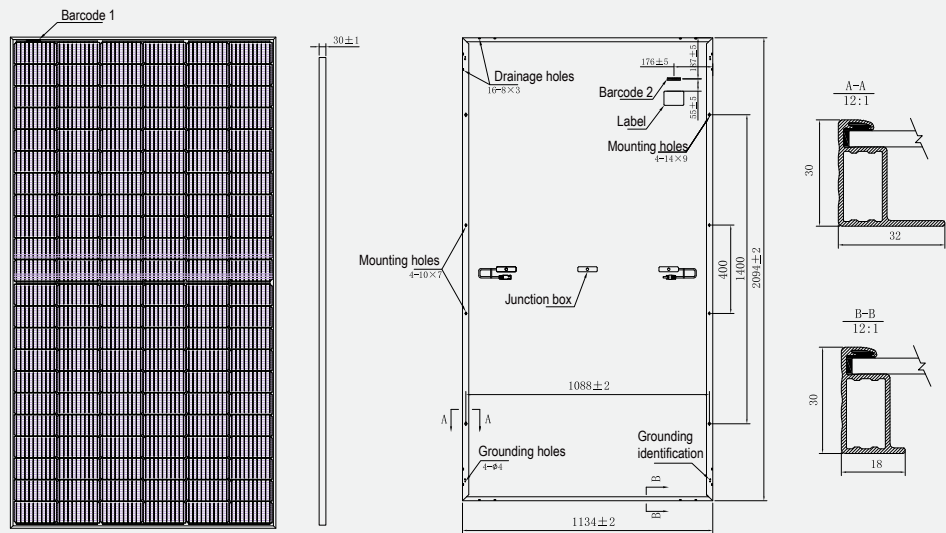

I-V CURVES OF PV MODULE(525W)

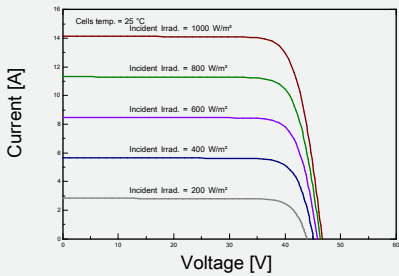

P-V CURVES OF PV MODULE(525W)

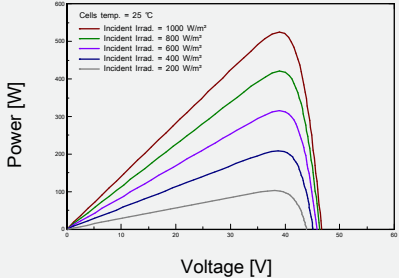

ELECTRICAL CHARACTERISTICS | STC*

Module Type	ZXM7 SHLD132-500/M	ZXM7 SHLD132-505/M	ZXM7 SHLD132-510/M	ZXM7 SHLD132-515/M	ZXM7 SHLD132-520/M	ZXM7 SHLD132-525/M
Nominal Power Watt Pmax(W)*	500±5	505±5	510±5	515±5	520±5	525±5
Maximum Power Voltage Vmp(V)	38.10	38.30	38.50	38.70	38.90	39.10
Maximum Power Current Imp(A)	13.13	13.19	13.25	13.31	13.37	13.43
Open Circuit Voltage Voc(V)	45.70	45.90	46.00	46.30	46.50	46.70
Short Circuit Current Isc(A)	13.84	13.90	13.97	14.02	14.08	14.14
Module Efficiency (%)	21.06	21.27	21.48	21.69	21.90	22.11

*The data above is for reference only and the actual data is in accordance with the practical testing
*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5
*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

MECHANICAL DATA

Solar cells	Mono PERC
Cells orientation	132 (6×22)
Module dimension	2094×1134×30 mm (With Frame)
Weight	29 ±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	PV-XT1609Nxyz, IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm²
Connectors*	PV-XT101.1 Suzhou Xtong Photovoltaic Technologies Co., Ltd. manufactured in china

ELECTRICAL CHARACTERISTICS | NMOT

Maximum Power Pmax(Wp)	374.70	378.30	382.00	385.60	389.30	392.90
Maximum Power Voltage Vmpp(V)	35.30	35.50	35.70	35.90	36.10	36.30
Maximum Power Current Impp(A)	10.61	10.65	10.70	10.75	10.79	10.84
Open Circuit Voltage Voc(V)	42.70	42.90	43.10	43.30	43.50	43.60
Short Circuit Current Isc(A)	11.18	11.23	11.27	11.32	11.37	11.42

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

TEMPERATURE RATINGS

NMOT	44°C ±2°C
Temperature coefficient of Pmax	-0.35%/°C
Temperature coefficient of Voc	-0.29%/°C
Temperature coefficient of Isc	0.05%/°C

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	25 A
Front Side Maximum Static Loading	Up to 5400 Pa
Rear Side Maximum Static Loading	Up to 2400 Pa
Maximum load front/back	3600/1600 with safety factor 1.5
Fire safety class	Class A
Safety class	Class II

*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection
*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.
They only serve for comparison among different module types.
*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills
and please carefully read the safety and installation instructions before using our PV modules.

PACKAGING CONFIGURATION *

Piece/Box	36
Piece/Container(40'HQ)	792

*Customized packaging is available upon request.