


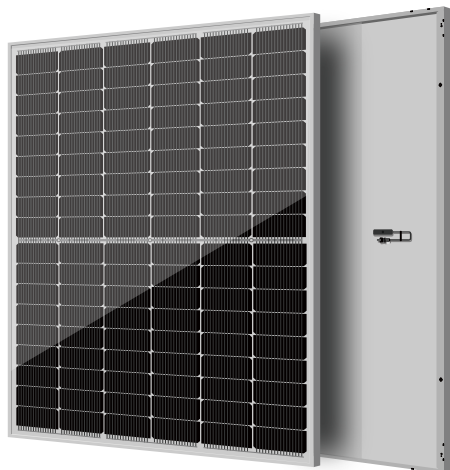

ZXMR-UHLD108 Series

16BB HALF-CELL N-Type TOPCon

Double Glass Monocrystalline PV Module

470-485W

POWER RANGE

22.81%

MAXIMUM EFFICIENCY

0.40%

YEARLY DEGRADATION




12 YEARS PRODUCT WARRANTY



30 YEARS OUTPUT GUARANTEE

12 years product warranty for general application
15 years product warranty for Rooftop PV system
30 years output warranty / 0.40% Annual Degradation over 30 years

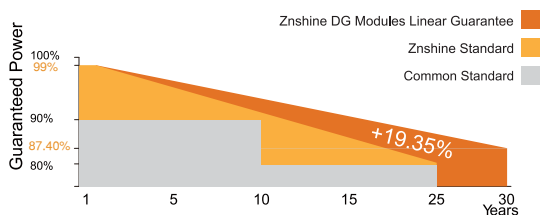

*Please check the valid version of Limited Product Warranty which is officially released by ZNSHINE PV-TECH Co.,Ltd.



IEC 61215/IEC 61730/IEC 61701/IEC 62716

ISO 14001: Environmental Management System

ISO 9001: Quality Management System

ISO45001: Occupational Health and Safety Management System

*As there are different certification requirements in different markets, please contact your local znshine sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

KEY FEATURES



Excellent Cells Efficiency

SMBB technology reduce the distance between busbars and finger grid line which is benefit to power increase.



Better Weak Illumination Response

More power output in weak light condition, such as haze, cloudy, and early morning.



TIER 1


Global, Tier 1 bankable brand, with independently certified advanced automated manufacturing.




Excellent Quality Management System

Warranted reliability and stringent quality assurances well beyond certified requirements.

DIMENSIONS OF PV MODULE(mm)

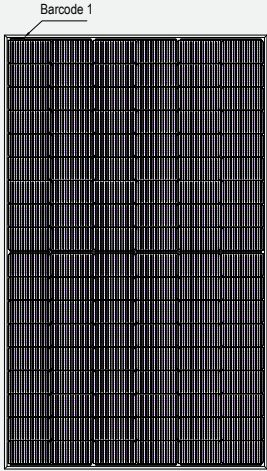

Barcode 1

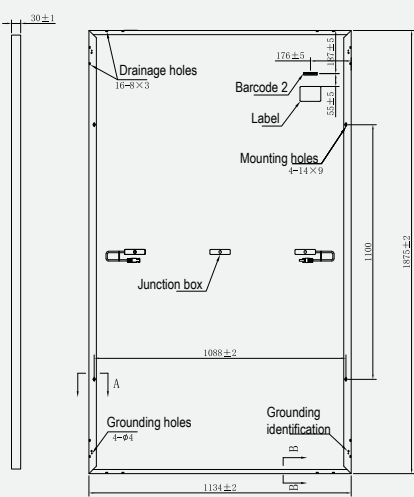

Drainage holes
16-6×3

Barcode 2


Label

Mounting holes
4-14×9


Junction box

Grounding holes
2-8×1

Grounding identification



A-A
12:1




B-B
12:1

Front View

Back View

*Remark: customized frame color and cable length available upon request


I-V CURVES OF PV MODULE(485W)

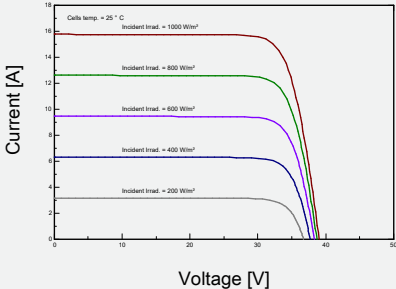

Current [A]

Voltage [V]

P-V CURVES OF PV MODULE(485W)

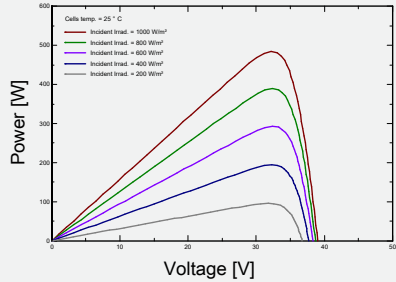

Power [W]

Voltage [V]

ELECTRICAL CHARACTERISTICS | STC*

Module Type	ZXMR UHLD108-470/N	ZXMR UHLD108-475/N	ZXMR UHLD108-480/N	ZXMR UHLD108-485/N
Nominal Power Watt Pmax(W)*	470±5	475±5	480±5	485±5
Maximum Power Voltage Vmp(V)	31.90	32.10	32.30	32.50
Maximum Power Current Imp(A)	14.74	14.80	14.87	14.93
Open Circuit Voltage Voc(V)	38.40	38.60	38.80	39.00
Short Circuit Current Isc(A)	15.59	15.65	15.72	15.78
Module Efficiency (%)	22.10	22.34	22.57	22.81

*The data above is for reference only and the actual data is in accordance with the practical testing
*STC (Standard Test Condition): Irradiance 1000W/m², Module Temperature 25±2°C, AM 1.5
*Measuring uncertainty: ±3%, all the electrical characteristics such as Power, Im, Vm and FF are within ±3% tolerance.

MECHANICAL DATA

Solar cells	N-type Monocrystalline, Rectangular cells
Cells orientation	108 (6×18)
Module dimension	1875×1134×30 mm (With Frame)
Weight	26.0±1.0 kg
Glass	2.0 mm+2.0mm, High Transmission, AR Coated Heat Strengthened Glass
Junction box	PV-XT1609Nxyz, IP 68, 3 diodes
Cables	H1Z2Z2-K 1×4,0mm²
Connectors*	PV-XT101.1 Suzhou Xtong Photovoltaic Technologies Co., Ltd. manufactured in china

*Please refer to regional datasheet for specified connector

ELECTRICAL CHARACTERISTICS | NMOT

Maximum Power Pmax(Wp)	357.90	361.60	365.40	369.10
Maximum Power Voltage Vmp(V)	30.00	30.10	30.30	30.50
Maximum Power Current Imp(A)	11.95	11.99	12.05	12.10
Open Circuit Voltage Voc(V)	36.40	36.60	36.80	37.00
Short Circuit Current Isc(A)	12.58	12.63	12.68	12.73

*NMOT: Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s

TEMPERATURE RATINGS

NMOT	44°C ±2°C
Temperature coefficient of Pmax	(-0.28~0.028)%/°C
Temperature coefficient of Voc	-0.23%/°C
Temperature coefficient of Isc	0.045%/°C

*Remark: Do not connect Fuse in Combiner Box with two or more strings in parallel connection
*Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.
They only serve for comparison among different module types.
*Caution: Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills
and please carefully read the safety and installation instructions before using our PV modules.

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C~+85°C
Maximum series fuse	25 A
Maximum load front/back	3600/1600 with safety factor 1.5
Fire safety class	Class A
Safety class	Class II

PACKAGING CONFIGURATION *

Piece/Box	36
Piece/Container(40'HQ)	864

*Customized packaging is available upon request.

ZNSHINE PV-TECH Co.,Ltd.

 Add : 1#, Zhixi Industrial Zone, Jintanjiangsu 213251, P.R. China

 Tel: +86 519 6822 0233

 E-mail: info@znshinesolar.com

Note: Specifications included in this datasheet are subject to change without notice.ZNSHINE reserves the right of final interpretation © ZNSHINE SOLAR 2024 | Version: ZXMR-UHLD108 2405.E

No special undertaking or warranty for the suitability of special purpose or being installed in extraordinary surroundings is granted unless as otherwise specifically committed by manufacturer in contract document